



Instruction Manual

Model: **ProPrompter HDi PRO2 LCD**



Contents

What's included in the kit.....	2
Configuration and Installation.....	3
Specifications.....	4


Mobile teleprompter w/10.4" LCD for use with Mac/PC laptops. May also be used with the Apple iPad (1st, 2nd, & 3rd gen).*

* iPad is a registered trademark of Apple, Inc. iPad requires optional bracket.

What's included in the kit

Includes:

- ProPrompter HDi PRO2 mirror box w/studio quality 60/40 beamsplitter glass - includes mount for included camera bar and optional 15mm rail system.
- 10.4" LCD w/ mirror function - supports VGA/HDMI/DVI/composite input sources. A 15ft VGA cable provided for connection to Mac/PC laptops. *Your laptop may require an optional VGA adapter.*
- ProPrompter Software for Mac/Win provided for prompting from your laptop. *Optionally, the ProPrompter App for iOS can be purchased for \$9.99 from the Apple iTunes App Store if using an iPad as your video source. An iPad requires a dock to VGA adapter to connect to the LCD.*
- Black Duvatyne anti-reflection mask - helps knock off surface reflections from the LCD screen and beamsplitter glass.
- Black lens sock - blocks light from entering the mirror box from behind and around the camera lens.
- Pistol Grip - for truly mobile handheld operation - can also be mounted to tripod.
- Camera Bar - supports weight of camera and mirror box - has 1/4-20 hole for optional mounting directly to tripod if pistol grip is removed.
- Thumb Screw - 1/4-20 thread to attach camera to camera bar.
- Military-grade rolling travel case w/pull handle - waterproof and air tight w/auto pressure relief valve.

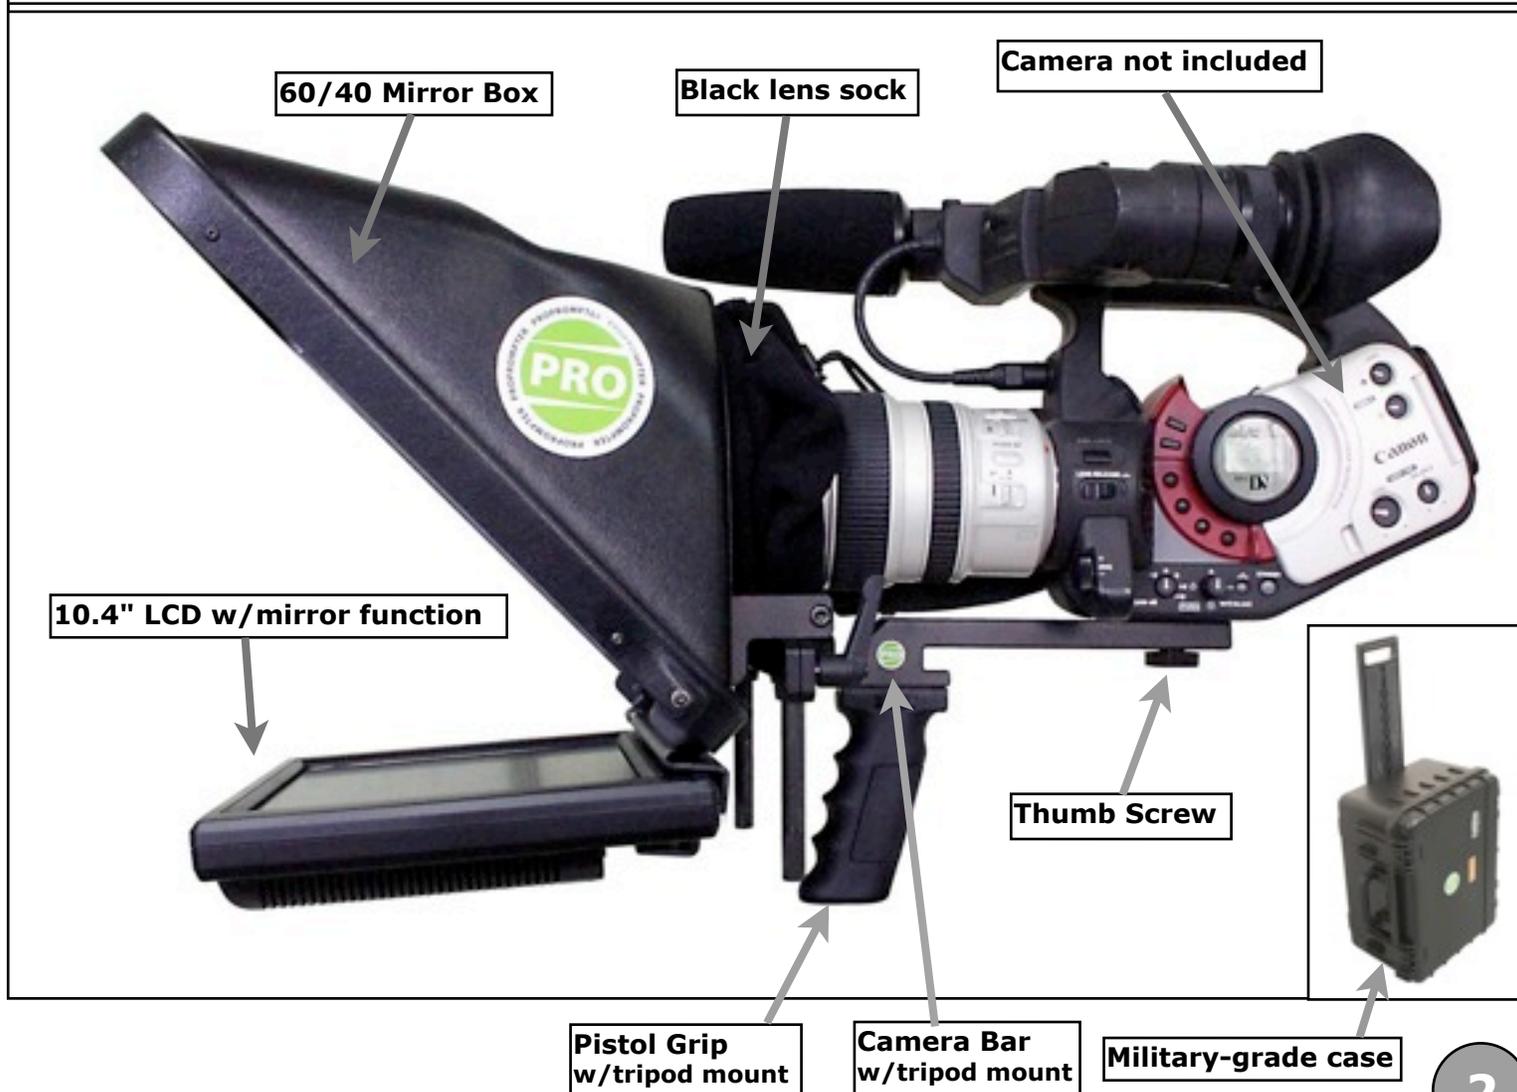

Configuration and Installation

Camera bar mount configuration



Installation Instructions:

1. Attach mirror box to camera bar with included thumb nut.
 2. Attach camera to camera bar with included thumb screw.
 3. Adjust vertical height of mirror box to center camera lens with mirror box opening. Secure in place with the lever handles.
 4. Wrap black lens sock around camera lens so no light can bleed through the rear of the mirror box.
 5. Attach the LCD to the mirror box bracket with the integrated thumbscrew.
 6. Option - Install black Duvetyne anti-reflection mask around mirror box perimeter with included velcro strip.
- Note: If the PRO2 will be primarily tripod mounted, remove the pistol grip and mount the camera bar directly to the tripod plate for best balance and stability.

Rail mount configuration - rail system not included



Installation Instructions:

1. Attach mirror box to optional rail system. Slide 15mm rails into rail holes and tighten securely using provided 4mm hex wrench.
2. Attach camera to rail system, see rail system instructions for mounting options.
3. Adjust vertical height of mirror box to center camera lens with mirror box opening. Secure in place with the lever handles.
4. Wrap black lens sock around camera lens so no light can bleed through the rear of the mirror box.
5. Attach the LCD to the mirror box bracket with the integrated thumbscrew.
6. Option - Install black Duvetyne anti-reflection mask around mirror box perimeter with included velcro strip.

Specifications



Shown here:
ProPrompter App
on iPad used as
video source for
LCD

- Optional Accessories -



ProPrompter iPad Bracket
for 1st,2nd,3rd gen iPad



MDClip
for iPhone, iPod touch
and Smartphones

ProPrompter HDi PRO2 LCD	Part #: PP-HD-I-PRO2-LCD
Beamsplitter Glass	Studio Quality 60/40
HDi Pro2 mirror box construction	High impact ABS & Aircraft aluminum
Maximum camera lens diameter supported	150mm OD
10.4" LCD w/mirror function	Supports VGA/HDMI/DVI/composite input
15ft VGA Cable	Connects LCD to Mac/PC or iPad - Mac/PC may require optional VGA adaptor, iPad requires dock to VGA adaptor (sold separately)
Bar mount configuration	Compatible with small to mid-size consumer cameras and mid-size pro cameras including but not limited to: Sony EX1, EX3, PD150, PD170, HVRZ1U Panasonic HVX200, AG-DVX100 Canon XF300 series, XL series, GL series
ProPrompter Software for Mac/Win	Compatible with Mac OS X 10.4 or higher - Win XP, Vista, 7
Rail mount configuration	Compatible with mid-size to shoulder-mount professional ENG cameras including but not limited to: Sony XDCam Panasonic HVX300
Rail system compatibility (rail system not included)	standard 15mm diameter rails spaced 60mm on center
Weight	HDi PRO2 LCD weight w/o LCD = ~ 5 lbs Kit weight in case = ~ 21 lbs
Dimensions	HDi PRO2 LCD fully assembled in camera bar config: 22x15x13" HDi PRO2 Case: 22x18x12"



BODELIN
technologies

Bodelin Technologies
6077A SW Lakeview Blvd.
Lake Oswego, OR 97035

www.bodelin.com
support@bodelin.com
800-441-6877