

Instruction Manual

Model: **ProPrompter HDi PRO2**



Contents

What's included in the kit.....	2
Configuration and Installation.....	3
Specifications.....	4



Mobile teleprompter for use with the Apple iPad (1st,2nd,3rd gen). *

* iPad is a registered trademark of Apple, Inc.

What's included in the kit

Includes:

- ProPrompter HDi PRO2 mirror box w/studio quality 60/40 beamsplitter glass - includes mount for included camera bar and optional 15mm rail system.
- iPad/iPad2 bracket - can optionally be mounted on a tripod by itself for 'beside the lens' prompting if desired.
- Black Duvatyne anti-reflection mask - helps knock off surface reflections from iPad screen and beamsplitter glass
- Black lens sock - blocks light from entering the mirror box from behind and around the camera lens
- Pistol Grip - for truly mobile handheld operation - can also be mounted to tripod
- Camera Bar - supports weight of camera and mirror box - has 1/4-20 hole for optional mounting directly to tripod if pistol grip is removed
- Thumb Screw - 1/4-20 thread to attach camera to camera bar
- Military-grade rolling travel case w/pull handle - waterproof and air tight w/auto pressure relief valve


Note: You will need to supply your own iPad and purchase the ProPrompter app from the Apple iTunes App store. Optionally, an iPhone, iPod touch, or second iPad can be used to wirelessly control the pace of the script on the iPad. A wired remote option is also available. See the ProPrompter App help menu for additional details.

iPad/iPad2 bracket (iPad not included)

Black lens sock

Camera not included

60/40 Mirror Box

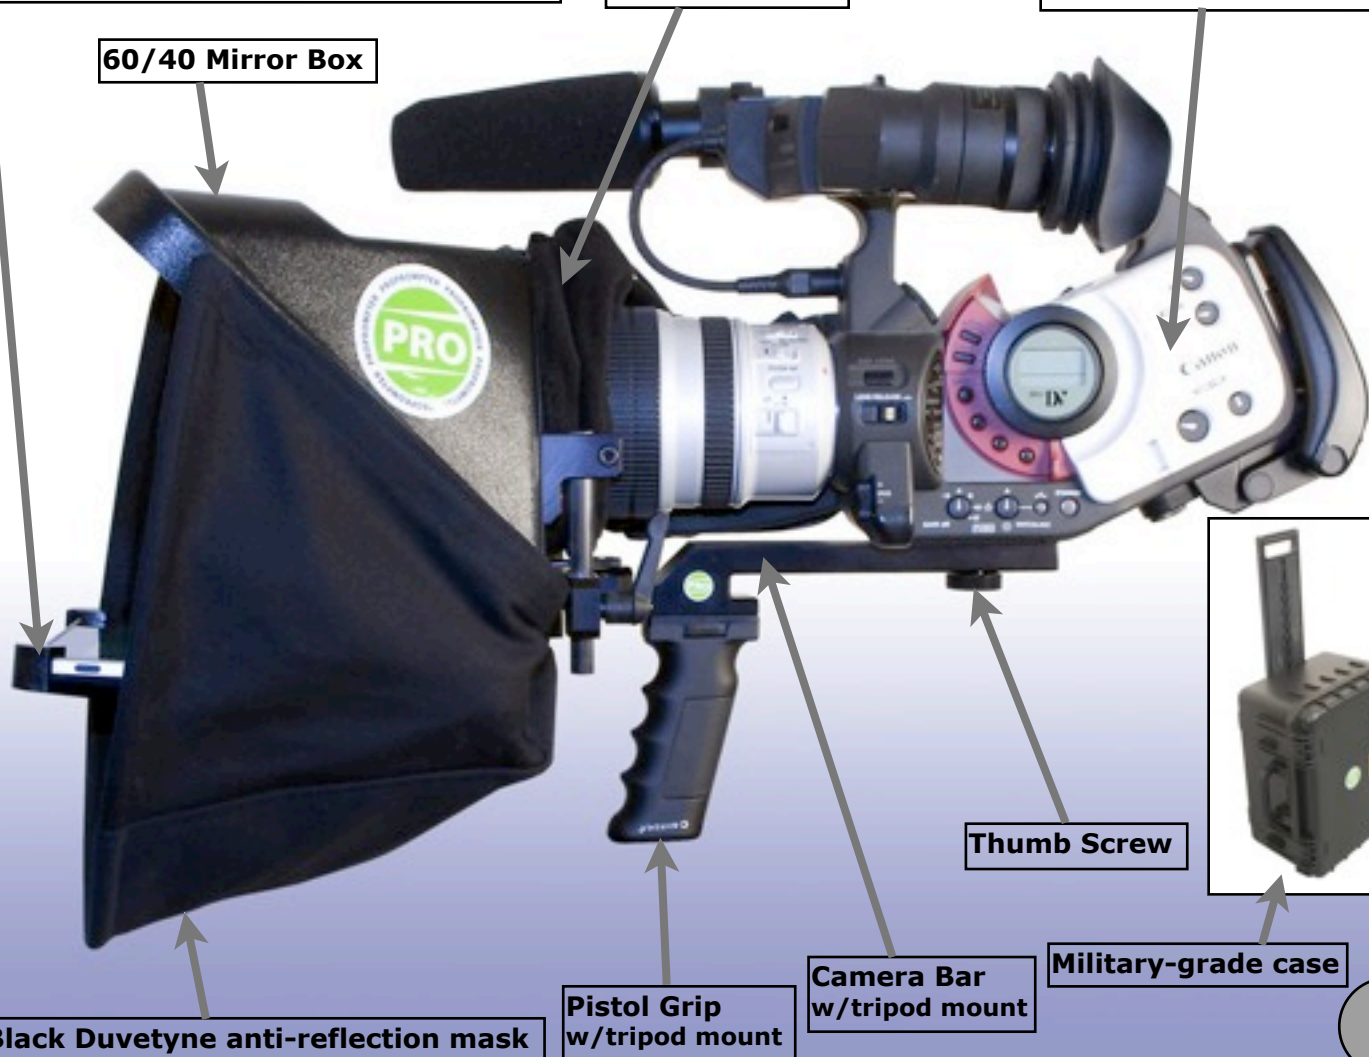

Configuration and Installation


Camera bar mount configuration



Installation Instructions:

1. Attach mirror box to camera bar with included thumb nut.
2. Attach camera to camera bar with included thumb screw.
3. Adjust vertical height of mirror box to center camera lens with mirror box opening. Secure in place with lever handles.
4. Wrap black lens sock around camera lens so no light can bleed through the rear of the mirror box.
5. Install the iPad into the iPad bracket, then attach to mirror box with included captured thumb screw.
6. Option - Install black Duvetyne anti-reflection mask around mirror box perimeter with included velcro strip.

Rail mount configuration - rail system not included

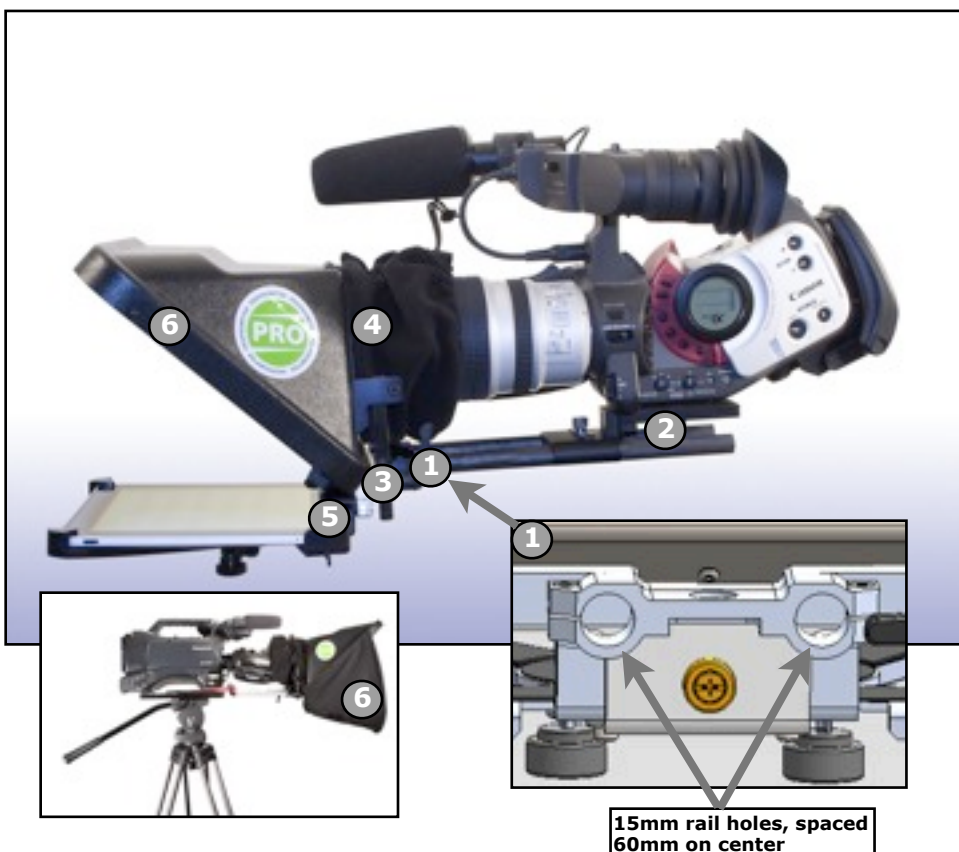

Installation Instructions:

1. Attach mirror box to optional rail system. Slide 15mm rails into rail holes and tighten securely using provided 4mm hex wrench.
2. Attach camera to rail system, see rail system instructions for mounting options.
3. Adjust vertical height of mirror box to center camera lens with mirror box opening. Secure in place with lever handles.
4. Wrap black lens sock around camera lens so no light can bleed through the rear of the mirror box.
5. Install the iPad into the iPad bracket, then attach to mirror box with included thumb screw.
6. Option - Install black Duvetyne anti-reflection mask around mirror box perimeter with included velcro strip.

15mm rail holes, spaced
60mm on center

Specifications



- Optional Accessories -



ProPrompter Wired Remote
for ProPrompter App script control



MDClip
for iPhone, iPod touch, and SmartPhones

ProPrompter HDi PRO2	Part #: PP-HD-I-PRO2
Beamsplitter Glass	Studio Quality 60/40
HDi PRO2 mirror box construction	High impact ABS & Aircraft aluminum
Maximum camera lens diameter supported	150mm OD
Bar mount configuration	Compatible with small to mid-size consumer cameras and mid-size pro cameras including but not limited to: Sony EX1, EX3, PD150, PD170, HVRZ1U Panasonic HVX200, AG-DVX100 Canon XF300 series, XL series, GL series
Rail mount configuration	Compatible with mid-size to shoulder-mount professional ENG cameras including but not limited to: Sony XDCam Panasonic HVX300
Rail system compatibility	standard 15mm diameter rails spaced 60mm on center
Weight	HDi PRO2 weight w/o iPad = ~ 5 lbs Kit weight in case = ~ 21 lbs
Dimensions	HDi PRO2 fully assembled in camera bar config: 22x15x13" HDi PRO2 Case: 22x18x12"



BODELIN
technologies

Bodelin Technologies
6077A SW Lakeview Blvd.
Lake Oswego, OR 97035

www.bodelin.com
support@bodelin.com
800-441-6877