

Instruction Manual

Model: **ProPrompter HDi PRO2 SP**



Contents

What's included in the kit..... 2
Configuration and Installation..... 3
Specifications..... 4



**Mobile teleprompter for use with any SmartPhone or Apple mobile devices:
iPhone, iPod touch, and iPad.***

* iPhone, iPad, and iPod touch are registered trademarks of Apple, Inc. iPad requires optional bracket.

What's included in the kit

Includes:

- ProPrompter HDi PRO2 mirror box w/studio quality 60/40 beamsplitter glass - includes mount for included camera bar and optional 15mm rail system.
- MDClip - mobile device clip to securely hold SmartPhones or Apple mobile devices such as iPhone iPod touch. Can optionally be mounted on a tripod by itself for 'beside the lens' prompting if desired. Optionally, you may purchase the ProPrompter iPad bracket for use with any iPad.
- Black Duvatyne anti-reflection mask - helps knock off surface reflections from SmartPhone screen and beamsplitter glass
- Black lens sock - blocks light from entering the mirror box from behind and around the camera lens
- Pistol Grip - for truly mobile handheld operation - can also be mounted to tripod
- Camera Bar - supports weight of camera and mirror box - has 1/4-20 hole for optional mounting directly to tripod if pistol grip is removed
- Thumb Screw - 1/4-20 thread to attach camera to camera bar

Note: You will need to supply your own SmartPhone or Apple mobile device. If using an Apple iPhone or iPod touch, you may optionally purchase the ProPrompter teleprompter app from the Apple iTunes App store. Optionally, a second Apple mobile device (iPhone, iPod touch, or iPad) can be used to wirelessly control the pace of the script on your iPhone or iPod touch. A wired remote option is also available. See the ProPrompter app help menu for additional details.



Configuration and Installation


Camera bar mount configuration



Installation Instructions:

1. Attach mirror box to camera bar with included thumb nut.
2. Attach camera to camera bar with included thumb screw.
3. Adjust vertical height of mirror box to center camera lens with mirror box opening. Secure in place with lever handles.
4. Wrap black lens sock around camera lens so no light can bleed through the rear of the mirror box.
5. Install mobile device into MDclip, then attach to mirror box with integrated thumb screw.
6. Option - Install black Duvetyne anti-reflection mask around mirror box perimeter with included velcro strip.

Rail mount configuration - rail system not included

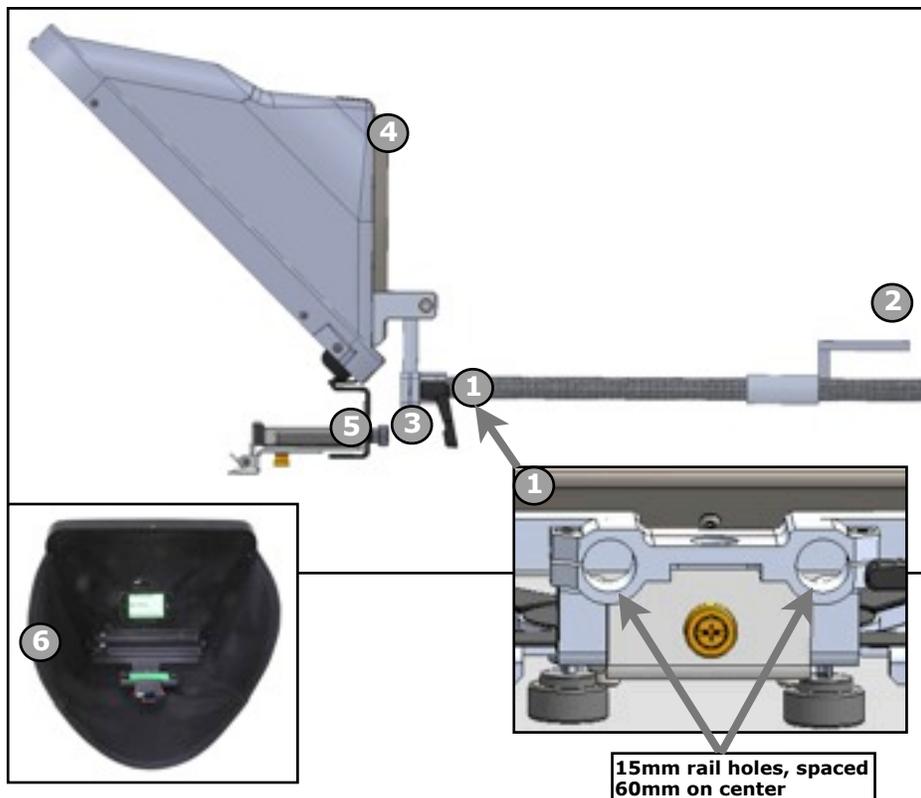

Installation Instructions:

1. Attach mirror box to optional rail system. Slide 15mm rails into rail holes and tighten securely using provided 4mm hex wrench.
2. Attach camera to rail system, see rail system instructions for mounting options.
3. Adjust vertical height of mirror box to center camera lens with mirror box opening. Secure in place with lever handles.
4. Wrap black lens sock around camera lens so no light can bleed through the rear of the mirror box.
5. Install mobile device into MDclip, then attach to mirror box with integrated thumb screw.
6. Option - Install black Duvetyne anti-reflection mask around mirror box perimeter with included velcro strip.

Specifications

- Optional Accessories -



ProPrompter Wired Remote
for ProPrompter App script control



ProPrompter iPad Bracket
for 1st, 2nd, 3rd gen iPad



PRO2 military grade rolling case

ProPrompter HDi PRO2 SP	Part #: PP-HD-I-PRO2-SP
Beamsplitter Glass	Studio Quality 60/40
HDi PRO2 mirror box construction	High impact ABS & Aircraft aluminum
Maximum camera lens diameter supported	150mm OD
Bar mount configuration	Compatible with small to mid-size consumer cameras and mid-size pro cameras including but not limited to: Sony EX1, EX3, PD150, PD170, HVRZ1U Panasonic HVX200, AG-DVX100 Canon XF300 series, XL series, GL series
Rail mount configuration	Compatible with mid-size to shoulder-mount professional ENG cameras including but not limited to: Sony XDCam Panasonic HVX300
Rail system compatibility	standard 15mm diameter rails spaced 60mm on center
Weight	HDi PRO2 SP weight = ~ 5 lbs Kit weight with optional case = ~ 21 lbs
Dimensions	HDi PRO2 SP fully assembled in camera bar config: 22x15x13" Optional PRO2 Case: 22x18x12"



BODELIN
technologies

Bodelin Technologies
6077A SW Lakeview Blvd.
Lake Oswego, OR 97035

www.bodelin.com
support@bodelin.com
800-441-6877